

ISUZU
LT 134



LUXURY REDEFINED...

SPECIFICATIONS OF ISUZU LT 134PR BUS


ENGINE	
Model	6 HK1-TC EURO-III Compliant Rear Engine
TYPE	4 Stroke, 6 Cylinders, OHC (Over head cam) Direct Injection, Water Cooled Turbo Charger with Inter Cooler and EGR
Displacement (cc)	7790
Max. Power	230PS @ 2500 RPM
Torque	704.2Nm@1500RPM
ELECTRICALS	
Type	24 VOLTS
Battery	2 NOS, 12 V, 150 AH
Alternator	24V, 110A
DRIVE TRAIN	
Clutch	Cushioned Single Plate, Dry, Hydraulically Controlled, Air assisted.
Transmission	7 Foward, 1 Reverse Synchronesh with overdrive
AXLES	
Front Axle	Reverse Elliot "1" Beam Section
Rear Axle	Full Floating
STEERING	
Type	Power Steering, Re-Circulating Ball Type with Hydraulic Booster
SUSPENSION (AIR SUSPENSION)	
Front	Air Suspension with 2 Bellows
Rear	Air Suspension with 4 Bellows
BRAKES	
Service Brakes	Full Air, Dual Circuit, S-Cam Type with Auto Slack Adjuster
Parking Brake	Spring Actuator on Rear Wheels

Exhaust Brake	Electro-Pneumatic with butterfly Valve in Exhaust pipe, Inter Locking Actuator for exhaust Brake & Foot Brake with cancelling switch
ABS	Provided
Retarder	Provided
Max Speed	115 KM / HR
Gradeability	7 Deg
SEATS	
No. of Seats (Variants)	45+1+1
Type	Push Back, Reclining Comfortable Seats with padded Arm Rests and Foot Rest (varies with seats layout)
DIMENSIONS	
Wheel Base	6260 MM
Overall Length	11995 MM
Overall Width	2600 MM
Overall height	3800 MM
Turning Radius	11150 MM
Min. Ground Clearance	260 MM
TRACK	
Front	2016 MM
Rear	1816 MM
WHEELS AND TYRES	
Wheels	10 Stud Wheel Discs
No. of Tyres	
Size	11-R22.5 - 14 PR (BS)
Fuel Tank Capacity	380 LTRS



SML ISUZU Limited

S.C.O. 204 - 205, Sector 34-A,
Chandigarh - 160 135.
Ph : 0172-2647700. Fax : 0172-2615111.
E-mail : salesadm@smlisuzu.com

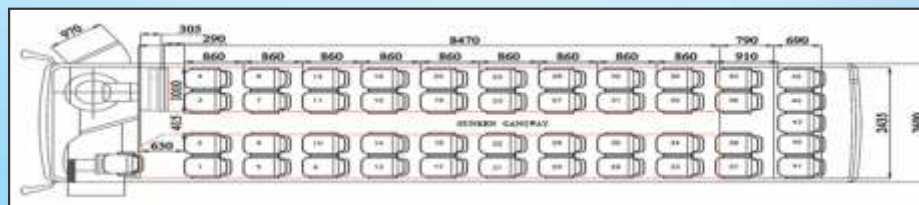

SEATING LAYOUT

Authorised Dealer :